

Product	Technologies					Drivers				Mounting Options				
	Articulated Array® speaker design	Line array	Active EQ	Direct radiator ported enclosure	Acoustimass® speaker technology	Waveguide technology	5.25-inch drivers	4.5-inch drivers	2.5-inch drivers	Bose® 12-inch Thunderwoofer	Wall mount	Hang and tilt	Floor mount	Portable stand
802® III Loudspeaker	●		●					●			●	●		●
502®A Loudspeaker	●		●					●			●	●	●	●
402® II Loudspeaker	●		●					●			●	●		●
302™A Loudspeaker	●						●		●		●			
MA12 Loudspeaker		●	●						●		●*			
MB4 Loudspeaker			●	●			●				●	●	●	
502 B Loudspeaker†			●		●					●	●	●	●	
502 BEX Loudspeaker			●		●					●	●	●	●	
Acoustic Wave® Cannon™ Series II Loudspeaker			●			●				●		●		

† Also for 502 BP portable speaker


* At listener height only

Product	Applications								Dispersion		
	Voice only	Voice & light music	Full-range music	Extended-range music	Business music systems	Engineered sound	Portable	Outdoor	70/100V transformer	Horizontal	Vertical
802® III Loudspeaker	●	●	●	●▲		●	●	●		120	100
502®A Loudspeaker	●	●	●	●		●			●	120	60
402® II Loudspeaker	●	●	●▲	●▲		●	●	●		178	93
302™A Loudspeaker	●	●	●	●▲	■	●			●	120	70
MA12 Loudspeaker	●	●	▲	▲		●			●	160	0
MB4 Loudspeaker					●	●	●			360	360*
502 B Loudspeaker						●				360	360*
502 BP Loudspeaker							●			360	360*
502 BEX Loudspeaker						●				360	360*
Acoustic Wave® Cannon™ Series II Loudspeaker						●				360	360*


● with 502 B ▲ with MB4 ■ with FS3

* All bass energy below 200Hz is omni-directional

Frequency Response ±3dB

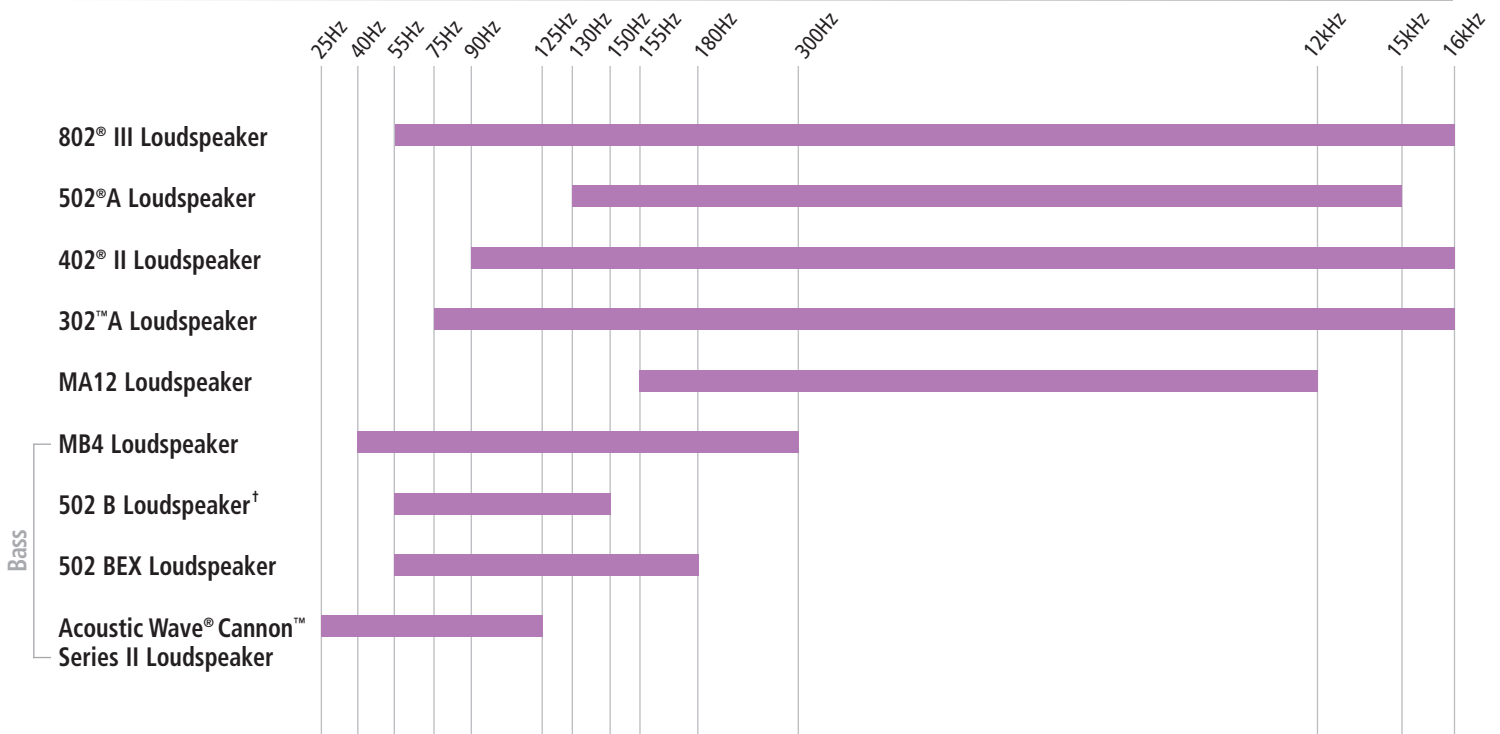

Continuous Maximum SPL @ 1m

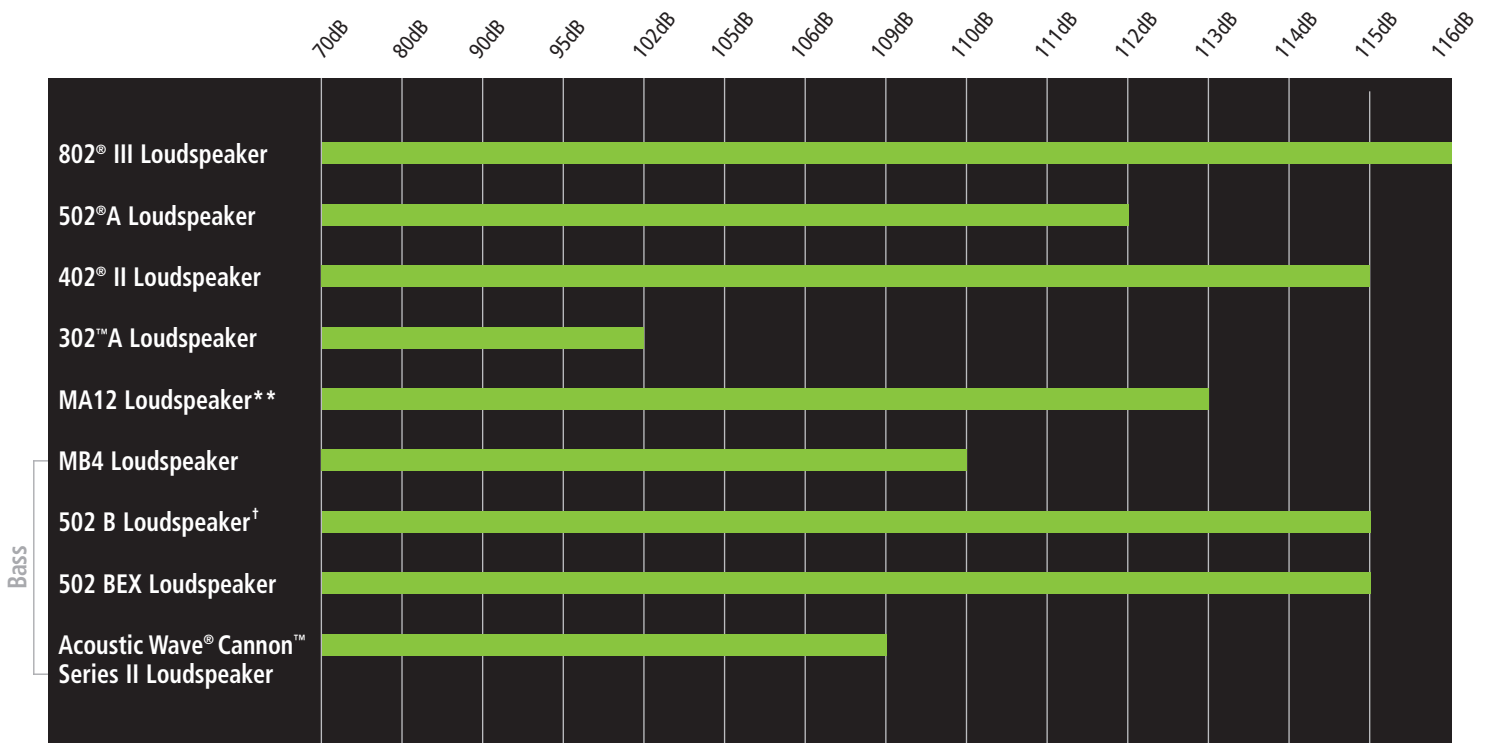

† Also for 502 BP portable model

** Line array design creates a 3dB drop off per doubling of distance